

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
 Organization
 International Bureau



(43) International Publication Date
 22 January 2004 (22.01.2004)


PCT

(10) International Publication Number
 WO 2004/007266 A1

- (51) International Patent Classification⁷: **B62D 61/00**,
 B66F 9/07
- (21) International Application Number:
 PCT/SE2003/001075
- (22) International Filing Date: 23 June 2003 (23.06.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
 0202204-4 15 July 2002 (15.07.2002) SE
- (71) Applicants (*for US only*): **DAHLSTRÖM, Magnus** (heir of the deceased inventor) [SE/SE]; Fjällgatan 22, S-116 28 Stockholm (SE). **VIKTORSSON, Lisa** (heiress of the deceased inventor) [SE/SE]; Bergmansgatan 20, S-983 35 Malmberget (SE). **DAHLSTRÖM, Johanna** (heiress of the deceased inventor) [SE/SE]; Centralvägen 3, 3tr, S-186 31 Vallentuna (SE). **DAHLSTRÖM, Sara** (heiress of the deceased inventor) [SE/SE]; Dalbovägen 4B, S-191 45 Sol-lentuna (SE).
- (71) Applicant and
 (72) Inventor: **SEGERLJUNG, Max** [SE/SE]; Penglund 112, S-911 94 Vännäs (SE).
- (72) Inventor: **DAHLSTRÖM, Kurt** (deceased).
- (74) Agents: **OLSSON, Jan** et al.; Bjerkéns Patentbyrå KB, Box 1274, S-801 37 Gävle (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: AN INDUSTRIAL TRUCK

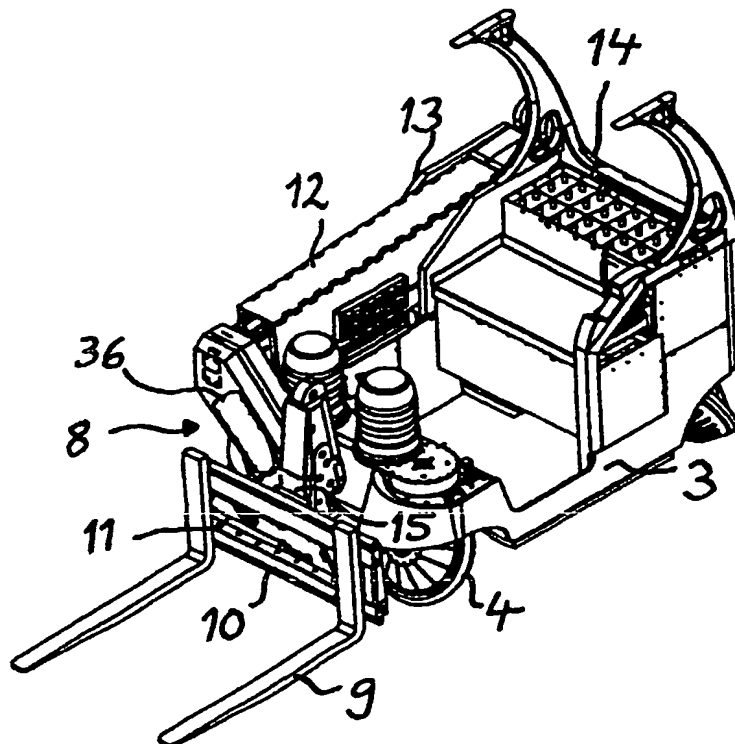

(57) Abstract: A vehicle of the industrial truck type comprises a chassis (3), at least three wheels (4) arranged to support the chassis while resting on the ground and a lifting unit (8) connected to the chassis having one or more members (9) arranged to carry loads and a power arrangement to raise and lower the load-carrying members relative to the chassis. The lifting unit is carried by the chassis via a mast-like beam (12), that is pivotably connected to the chassis about a substantially horizontal axis. Power means is arranged to pivot the beam about this axis relative to the chassis.

WO 2004/007266 A1